



A LEGACY *of* TRUST

AlKhalili Group

OMAN

Al Khalili United Enterprises
Al Khalili Electricals
Al Khalili Construction
Al Khalili Technology
Al Khalili Fire & Safety
Al Khalili Solid Surfaces
Al Khalili Auto Services
Al Khalili Oil & Gas Services
Al Khalili Logistics

UAE

Al Khalili Logistics
Al Khalili United General Trading
Al Khalili Trading Free Zone Company (FZCO)
Al Khalili Systems & Electrical Installations

QATAR

Buildex Trading LLC Electricals
Buildex Trading LLC ICT & ELV

ABOUT US

Al Khalili United Enterprises was the genesis of what grew to become the Al Khalili Group and remains a prominent, diverse business entity headquartered in Muscat, Sultanate of Oman. Established in 1976, it has progressively diversified into various business verticals such as building materials, hardware, power tools, construction machinery, paints and chemicals.

In Oman, Al Khalili operates over 26 retail outlets in all the governorates of Oman, including many sub-dealers, traders and sub-contractors/applicators who represent all Al Khalili products and services. The group is also the exclusive distributors of many renowned global brands from the USA, Canada, South America, UK, Europe, the Far-East and Asia.

Al Khalili is the preferred vendor for various governmental organizations as well as a trusted partner to all major contractors in Oman.

STRENGTHS



Est. in 1976 with over 40 yrs of industry exp.



Wide array of products and services



Efficient logistics distribution framework



Proficient after-sales service team



Professionally qualified and trained staff



Resilient customer-care centre



ISO 9001:2015 accredited organization



Mobile service unit to serve customers at the worksite



In-country value (ICV) focused on human resource development



State of the art warehousing facility

Contents

Water Heaters	04
PPR Pipes and Fittings	11
Sanitaryware	15
Bath Accessories	19
Sanitary Accessories	25
Godrej	29
General Lock	37
Door Fittings	41
Furniture Fittings	45
Index	49
Fasteners	63
Ladders and Scaffoldings	69
Paint Accessories	73
Metal Profile	77
Packaging	81
Wheel & Accessories	87
Water Hoses	91
Pipe Fittings	95
Miscellaneous Hardware	101
Building Supplies	107



WATER HEATERS



Point of Use



Capacity (LTR)

30

50

80

100

Installation	Vertical & Horizontal wall mounted
Application	Point of Use (POU) water heaters can help to reduce heat lost in the water distribution system. The term "point of use" is applied because water is heated very near the sink, shower or bath where the water is used.

WATER HEATER

Central Water Heater



Capacity (USG)

- 40
- 50
- 65
- 80
- 120

Installation	Vertical Floor Mounted
Application	Instead of using an independent hot water source in each bathroom, this solution provides a supply of hot water to all your outlets (bathrooms, kitchen, etc) from a central point where a central water heater takes care of heating a hot water tank big enough to supply the needed capacity.

WATER HEATER

Solar Water Heater



Capacity (LTR)

150

200

300



Application	Solar water heaters can be used for Homes, Community Centers, Hospitals, Nursing homes, Hotels, Restaurants etc. Use of solar water heater can curtail electricity or fuel bills considerably.
--------------------	--

WATER HEATER

Commercial Water Heater



Capacity (USG)

125 - 4000

Installation	Custom made
Application	Commercial volume storage water heaters designed for industrial, commercial and institutional users who require large quantities of service water at present temperatures.

WATER HEATER

PPR PIPES AND FITTINGS



PPR Pipe



Grade	PN25, PN20, PN16
Type	Single Layer, Multy Layer, UV-Resistant, Anti Microbial
Size	20 mm - 125 mm
Thickness	SDR5, SDR6, SDR7.4
Length	4 m
Application	Used for Hot and cold potable water piping networks in residential and commercial buildings. Extended durability due to the high resistance to aggressive elements.

PPR Fittings

Grade	PN25
Size	20MM-125MM
Thickness	SDR5
Type	Green,Black(UV)



PPR Welding Machine



Grade	Fusion Welding
Size	20-40MM, 50-125MM
Application	Pipe Welding Machine Ensures Perfect Fusion Of Your Pipes Joints

PPR Pipe Cutter



Size	20-63 mm, 50-127 mm
Application	PPR cutter make sure the cuts are as smooth and even as possible without any burrs.

SANITARYWARE



Angle Valve



Grade	Brass, Chrome Plated
Size	1/2", 3/4"
Brand	Bold, Chroma,
Application	Used in the water supply lines of toilets, plumbing fixtures and appliances. A quarter turn of the handle on an angle valve will quickly shut off the water being supplied to a fixture and help prevent an overflow.

Kitchen Sink



Grade	SS304, SS316
Type	Single Bowl Single Drain, Double Bowl Double Drain, Single Bowl Double Drain, Double Bowl Single Drain, Round Bowl, Rectangular Bowl etc. Flush Type & Layon
Width	50 cm, 60 cm
Thickness	0.6 mm - 1.00 mm
Length	80 cm, 180 cm
Brand	PO, AKWA
Application	Kitchen sink is a basin for washing utensils used for cooking, eating and drinking, located in a kitchen and connected to both hot and cold waterlines and properly connected to a sanitary sewer system.

Basin Mixer



Brand	Bold, Pentagono, H2O, Chroma
Application	Basin mixers are a straightforward and stylish option for any cloakroom, family bathroom or en-suite. By combining the hot and cold water supplier inside the cartridge within the tap body, basin mixers are easy to use giving you the temperature you want every time.

Bath Mixer



Brand	Bold, Pentagono, H2O, Chroma
Application	Take water from a hot and cold feed and mix it before it comes out of a single spout. They can be bath, wall or floor mounted.

Sink Mixer



Brand	Bold, Pentagono, H2O, Chroma
Application	Most common style of tapware used in kitchens mixer systems have just one tap delivering both hot and cold water.

Shower Mixer



Brand	Bold, Pentagono, H2O, Chroma
Application	Mix hot and cold water supply in a valve so that the desired or chosen water temperature reaches the shower head. A shower mixer can be used with either low- or high-pressure water supplies.

Bath Tub Mixer



Grade	Bold, Pentagono
Size	Simplest way of showering over the bath. They can either be exposed or built-in. A diverter valve allows the user to switch between bath filling and showering

Shattaf



Brand	Bold, Pentagono, Allflex
Type	Plastic, Brass
Application	Shattaf is specifically the hose style bidet that is used to clean yourself.

BATH ACCESSORIES



Bottle Trap




Size	1 1/4", 1 1/2"
Type	PVC,S.S,C.P
Application	Bottle traps usually get blocked with debris that goes down the sink, such as food waste. Fortunately, they're easy to unblock and you can get your sink back to its usual state in no time.

Tissue Holder



Type	S.S
Brand	Sundex
Application	A toilet-roll holder, also known as a toilet paper dispenser, is an item that holds a roll of toilet paper

Flexible Hose

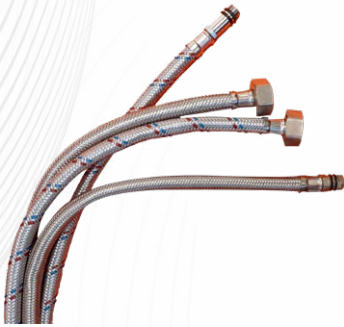

Grade	Aluminum, S.S
Size	30, 45, 60, 90, 120 cm
Brans	Sundex
Application	Used to connect taps to the Hot/Cold water supply and are a great solution when connecting taps in confined area.

Floor Drainer



Grade	SS304,SS316
Size	2",3",4"
Length	8",12",18",24"
Application	Whether indoors or outdoors, floor drains are designed to efficiently and safely direct water to a sewer or municipal storm drain so that the floor stays dry and rooms don't flood. The purpose of traps is to prevent sewer odors and gasses from making their way through the drain and into your home.

Waste Pop-Up



Size	Brass
Type	Bold,Sundex
Application	Purpose of waste pop-up is to handle clogs or blockages that would otherwise compromise the efficiency of your drainage system.

Siphone



Type	Single Head, Double Head
Size	1 1/4"
Application	Accumulating water in a small tank that is located between the drain and the water outlet. Thus, it prevents the appearance of bad odors caused by the putrefaction of the waste.

Soap Dispenser



Grade	P.V.C, S.S
Capacity	500 ml, 800 ml
Application	Soap dispensers are often found in public toilets. is a device that, when manipulated or triggered appropriately, dispenses soap

Cleanout



Grade	SS304, SS316
Size	4x4", 6x6"
Application	It is easily accessible section of capped pipe located on a drain pipe or sewer line

Coat Hook



Grade	SS304, Aluminum, Brass
Size	4",5"

Towel Shelf



Grade	SS304, Chrome Plated
Size	60 cm, 80 cm

Towel Rail



Grade	SS304, Chrome Plated
Size	60 cm, 80 cm

Mirror Shelf



Size	60 cm
------	-------

Shampoo Shelf



Grade	SS304
Size	Single, Double

Soap Dish



Grade	SS304, Glass
Size	3"x4", 5"x6"

Towel Ring



Grade	SS304
Size	16CM,18CM,21CM
Thickness	10MM
Type	Round, Square

SANITARY ACCESSORIES



CP Pipe



Size	1/2", 3/4", 1"
Thickness	1.2 mm, 1.5 mm
Length	12 ft
Application	Used in sanitary fittings

CP Pipe Fittings



Size	1/2", 3/4", 1"
Type	Nipple, Reducer Bush, Socket, TEE, Elbow
Application	Pipe fittings used in sanitary fittings

Ball Valve



Grade	Chrome plated, Brass
Size	1/2" - 4"
Application	Used to isolating a range of fluids in pipe lines.

Faucet



Grade	Chrome plated, Brass
Size	1/2", 3/4", 1"
Application	Primarily used as an outside tap or garden tap to provide an external water supply. It easy to connect on to a wall mounted fixing joined to a water pipe.

Water Meter



Grade	Liter, Gallon
Size	1/2"
Application	Used to measure the quantity (volume) of water that passes through a pipe or other outlet.

PTFE Tape



Grade	1/2"
Size	12 m
Length	Used in plumbing for sealing pipe threads.

Shellac



Size	100 ml
Application	It seals the pores created in the seams of oil and water tanks, as well as threads and gaskets.

Foot Valve



Grade	Brass
Size	1/2" - 3"
Application	They are a type of check valve but are used at the end of a pump suction line. Foot valves help keep a pump primed therefore stopping your pump from burning out.

Gate Valve



Grade	Brass, Cast Iron
Size	1/2" - 8"
Application	Used to completely shut off fluid flow or, in the fully open position, provide full flow in a pipeline. Thus it is used either in the fully closed or fully open positions. A gate valve consists of a valve body, seat and disc, a spindle, gland, and a wheel for operating the valve.

Non Return Valve



Grade	Brass, G.I, Cast Iron
Size	1/2" - 4"
Application	A non-return valve, also known as a check valve, clack valve, one-way valve or retention valve, is designed to allow fluid to flow in one direction only, therefore preventing the liquid or gas from flowing back upstream of the valve.

Float Valve



Grade	Brass, PVC
Size	1/2" - 2"
Application	Used to keeping on a determined level the stretch of water in a water tank. It is set up on the supply pipe at the bottom. It opens when the water tank goes down below the chosen level and closes progressively whenever the maximal level is reached.


Godrej



Brass Padlocks



- ▲ Sherlock 40-70 mm
- ▲ Also available in 2-in-1 packs

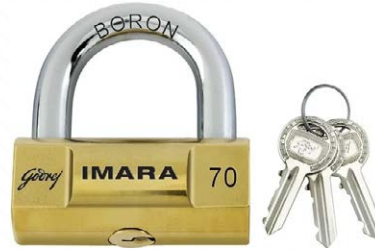

- ▲ Imara 70-80 mm

Brass/ Iron Padlocks



- ▲ Godrej No.1 40-70 mm



- ▲ Duralock XL+ 70-90 mm
- ▲ Also available in 2-in-1 pack



- ▲ Duralock XL+ 70-90 mm
- ▲ Also available in 2-in-1 pack

Premium & Hi-Security Padlocks



- ▲ Herculoc Plus
- ▲ Available in 19 & 40 mm Shut Height

Lever Handles



- ▲ 2L Regal - Keyed
- ▲ Available in 45 mm & 55 mm Backset

Door Handles



- ▲ ARC 5
- ▲ Size: 240 mm & Finish : SS, AB



- ▲ ARC 7
- ▲ Size: 200, 228 mm & Finish : SS, AB



- ▲ ARC 9
- ▲ Size: 200, 240 mm & Finish : SS, ABB



▲ Mensa - 1



▲ Mensa - 2



▲ Mensa - 3



▲ Mensa - 4



- ▲ NEH 05
- ▲ Size: 200 & 240 mm
- ▲ Finish: SS & AB
- ▲ Baby Latch is also available



▲ Oliver



▲ Gloria

Pull Handles



- ▲ Mercury
- ▲ Size: 200 mm
- ▲ Finish: Satin



- ▲ Phoenix
- ▲ Size: 200 mm
- ▲ Finish: Satin



- ▲ Orbit
- ▲ Size: 200 mm
- ▲ Finish: Satin



- ▲ Tibo
- ▲ Size: 240, 300 mm
- ▲ Finish: Satin, AB



- ▲ Carina
- ▲ Size: 240, 300 mm
- ▲ Finish: Satin, AB



- ▲ Theo
- ▲ Size: 240, 300 mm
- ▲ Finish: Satin, AB



- ▲ Vibe
- ▲ Size: 240, 300 mm
- ▲ Finish: Satin, AB



- ▲ SS Tube Lever
- ▲ Handle, 300 to 900mm
- ▲ H-type



- ▲ Bella
- ▲ Finish: SS & AB



- ▲ Exult
- ▲ Finish: SS & AB



- ▲ Elena
- ▲ Finish: SS & AB

Round Locks



- ▲ Round Lock SS Keyed
- ▲ Size: 60 & 70



- ▲ Round Lock Brass Keyed
- ▲ Size: 60 & 70

Mortise Lockbody



- ▲ Eco Lock Body
- ▲ Size: 240 & 270 mm
- ▲ Backset: 40, 45 & 50 mm
- ▲ Finish: SS, Brass, AB



- ▲ Lockbody 3-Deadbolt
- ▲ Size: 240 & 270 mm
- ▲ Backset: 50 & 60 mm
- ▲ Finis: Satin, Brass

Mortise Cylinders



- ▲ Cylinder 2C
- ▲ Size: 60 to 100 mm
- ▲ Finish: Satin, Brass, AB



- ▲ Cylinder 1CK
- ▲ Size: 60 to 100 mm
- ▲ Finish: Satin, Brass, AB

Rim Locks



- ▲ Joint Cylinder Rim lock



- ▲ Grill Door lock



- ▲ Night Latch

Door Closers



▲ Door Closer 60 kg – Silver colour



▲ Door Closer 60 kg – Gold colour



▲ Door Closer 60 kg – Brown colour



▲ Door Closer 60 kg – White colour

Panic Bar



▲ Single Point Panic Bar



▲ Two Point Panic Bar



▲ Single Point Panic Bar



▲ Two Point Panic Bar

Digital Locks



▲ Advantis Technosecure



▲ Advantis Revolution



▲ Advantis Rimtronics



▲ Advantis Technosecure



▲ Advantis Revolution



▲ Advantis Digital Cabinet Lock

Hotel Locks



▲ Magna



▲ Omega



▲ Orion

Features:

1. CE, Fire rated and ANSI Certified
2. Emergency opening
3. Mortise lock function
4. Battery option available

Accessories as per requirement:

1. RFID Card types - Staff, Guest, Query, Temporary, Lock setting change, Time card, Authorising, Locking card, Emergency
2. Software
3. RFID Encoder
4. Handheld Device
5. Energy Saving Device

Furniture Locks



▲ Popular Multi Purpose Lock



▲ Multi Purpose Lock

Drawer Channels



- ▲ Soft Closing Drawer Channel
- ▲ Length: 12 to 24 inches
- ▲ Capacity: 30 kg & 45 Kg
- ▲ Finish: Zinc

Regular Cabinet Hinges



- ▲ Regular Cabinet Fittings
- ▲ Slip on (Half Overlay)



- ▲ Regular Cabinet Fittings
- ▲ Clip on (Half Overlay)

GENERAL LOCKS

Master Lock



▲ Masterlock-427-Labeled Snap-On Hasp-Red



▲ Masterlock-5425eurd-Dial Keylock Box-Wm



▲ Masterlock-R.cable-Lockout Dev-Scc-S856



▲ 2 Bungees 60cm-Master Eco-4373EURDAT



▲ Adjustable Bungee cord 100-150cm-3138EURDAT



▲ Alum Comb Padlock Steel Shackl Comb

Pad Lock

Grade	Brass, Aluminium
Size	25 mm - 80 mm
Brand	Yale, Masterlock, Union, Tricycle
Length	Short & Long Shackle
Type	Kyed, Combination, Digital etc.





▲ Armrd cable 1,20 m x 22 mm
8115EURDPS



▲ Buckle straps 1,20 m x 25 mm
- 3004EURDATCOL



▲ Combination padlock BLUE-
1525BLU



▲ Keyed Diff Python Cable 1,80 m
8433EURD



▲ Lashing straps 5m MastEco-
Rang-4364 EURDAT



▲ Looped end Cable 1,80 m
78EURD



▲ Masterlock-Permit Cont Stat
Full-S3500



▲ Ratchet tie down w/S-hks4,
25m-3066EURDAT



▲ Vinyl chain 1000 mm 10 mm
dia-8019EURD



◀ Zinc PadLock (x2)-3dig
-4686EURT


DOOR FITTINGS

Door Hinges



Finish	Polished Brass, Satiny, Chrome, Copper, Antique, M.S
Size	1x1", 2x3", 3x4", 4x4" etc.
Application	Door hinges are used to attach a door to its frame, they are the pivot point allowing the door to open and close with ease. They can be used whether you are replacing an existing door or hanging a new one. Available in a wide range of different types, lengths, colours and finishes to suit any job.

Aldrop

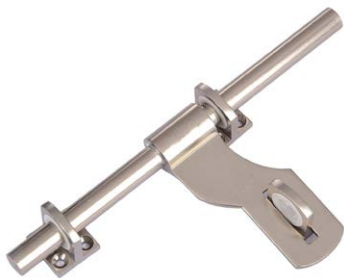

Grade	Brass, Aluminium, M.S, Chrome plated
Size	8", 10", 12"
Diameter	5/8", 1/2"
Application	Door Aldrops are also known as 'Kundi' in Hindi fitted at the door and can be used to the both side of the door used to close or open the door. It is a mechanical device which doesn't need any key just push or slide the aldrops in its place to close or release to open the door.

Flush Bolt



Grade	Brass, SS
Size	6" - 12"
Application	Flush bolts are used to secure the inactive leaf of a pair of doors, projecting into the frame head and into a floor strike

Door Stopper



Grade	Rubber, PVC, Chrome plated, SS, Brass
Size	1" - 8"
Application	Used to hold a door open or closed, or to prevent a door from opening too widely.

Door Handle



Grade	Polished Brass, Satiny, Chrome, Nickle plated
Size	72 cm, 85 cm
Brand	Yale, Yuni, Reguitti, Collins

Rossete Handle



Finish	Polished Brass, Satiny, Chrome, Nickle plated
Size	72 cm, 85 cm
Brand	Yale, Yuni, Reguitti, Collins

Lock Set



Grade	Brass, Satiny
Type	Dead lock, sash lock

Door Cylinder



Grade	Brass, Satiny, Chrome, Nickle plated
Brand	Yale, Yuni.
Size	50 mm, 70 mm
Type	Key, Thumb Turn

Door Bottom Brush



Size	1.2 Mtr
Application	prevents infiltration of sound, light, drafts, insects, moisture, smoke or fire. As opposed to rubber, brush sweeps have a smoother glide along the floor and have more flexibility for slightly uneven surfaces, such as concrete.

T Hinges



Grade	M.S
Size	3" - 8"
Application	combination of a strap hinge and a butt hinge. They come with countersunk holes and are generally mounted to wooden doors and frames. They are most commonly used on gates, garage doors, and a variety of doors to add a decorative classic rustic look.

Pintal Hinges



Finish	M.S, S.S
Size	10MM-40MM
Application	They are commonly used to connect gates to a post or wall. Also used in truck doors.

Window Handle



Grade	Aluminium, Chrome plated
Size	4", 6"
Application	A window handle is a short length of material that attaches to a window in order to aid rotation of the hinge and therefore opening and closing of the window

Door Closer



Grade	60 Kg, 90 Kg, 120 Kg
Size	Overhead, concealed
Application	Door closer is used to automatically close a door after it has been opened

Door Chain Guard



Grade	SS304, Brass
Size	5", 6"
Application	Door chains are mainly intended to allow a person inside a structure to open the door slightly for purposes of communicating with individuals outside or exchanging small objects through the door while still preventing the individuals outside from gaining unauthorized access into the structure.

Door Viewer



Grade	Brass, SS304
Size	160 & 200 Degree
Application	To see who is at the door without opening it: Door viewers are primarily used for security and burglary protection.

FURNITURE FITTINGS



Piano Hinges



Finish	Brass
Size	1x1"
Length	8 Feet
Application	Piano Hinges are used to attach a door to its frame, they are the pivot point allowing the door to open and close with ease. They can be used whether you are replacing an existing door or hanging a new one. Available in a wide range of different types, lengths, colours and finishes to suit any job.

Drawer Runner



Grade	Soft closing bearing
Size	14",16",18",20",22"
Application	long metal sliding mechanisms that enable the opening and closing of drawers. One bracket is fitted to the furniture and the other to the drawer itself, either on the bottom or on the side.

Concealed Hinges



Grade	Chrome plated,S.S
Type	Full-A, Half-B, Inside-C (Glass & Wood)
Application	concealed hinge is one that lays flush within the door to mask the hinges location. The purpose of the concealed hinge is to provide a smooth surface to the outer perimeter of the door

Ball Catcher



Finish	Brass
Size	1",1 1/2",2"
Length	Widely used for holding doors without a latch closed, such as swinging doors, double closet doors Etc.

Knobe



Grade	Wooden,Plastic,Brass
Size	3/4" - 2"
Application	doorknob is a handle used to open or close a door. Mainly for cupboards and drawers.

Glass Runner Wheel



Grade	SS
Size	6MM,8MM
Type	Single Wheel, Double Wheel
Application	Glass runners for sliding glass door and window systems

Drawer Lock



Grade	Chrome plated, Brass
Application	Cupboards, Shelves, Drawer Etc.

Edge Lipping



Color	White, Wood Grains, Solid Colors Etc.
Size	18 MM
Length	50 MTR, 100 MTR
Application	Edge banding or edging has wide use in furniture making

Chest Handle



Grade	MS, SS304, GI
Size	4", 6"
Application	Chest Handle used for crates, wooden boxes, shipping containers and other applications where strength and durability are required.



 **INDEX**[®]
FIXING SYSTEMS

WINGED STEEL ANCHOR FOR HEAVY-DUTY FIXINGS

AC-CA Shield

SOLID

SIZE	SHIELD LENGHT
M6 x 40 Ø10	40
M8 x 50 Ø14	50
M10 x 60 Ø16	60
M12 x 80 Ø20	80
M16 x 100 Ø25	100



AC-CI Stainless steel A4 shield

**STAINLESS
STEEL**

SIZE	SHIELD LENGHT
M6 x 40 Ø10	40
M8 x 50 Ø14	50
M10 x 60 Ø16	60
M12 x 80 Ø20	80



AC-TO Loose bolt 6.8

SOLID

SIZE	PROJECTING BOLT LENGTH
M6 x 40 Ø10	50
M8 x 50 Ø14	60
M10 x 60 Ø16	70
M12 x 80 Ø20	100
M16 x 100 Ø25	120



AC-ES Projecting bolt

SOLID

SIZE	PROJECTING BOLT LENGTH
M6 x 40 Ø10	60
M8 x 50 Ø14	70
M10 x 60 Ø16	80
M12 x 80 Ø20	115



AC-AR Eye bolt

SOLID

SIZE	EYE BOLT Ø
M6 x 40 Ø10	10
M8 x 50 Ø14	12
M10 x 60 Ø16	14
M12 x 80 Ø20	17



AC-GA Hook bolt

SOLID

SIZE	APERTURE HOOK
M6 x 40 Ø10	10
M8 x 50 Ø14	11
M10 x 60 Ø16	14
M12 x 80 Ø20	18



MOP - Polyester



410 ml



300 ml

Characteristics

- Assessed for all types of concrete, non-cracked, and all concrete applications. Valid for hollow and solid masonry
- Assessed studs from M8 to M24
- Use for medium-high loads
- Valid for dry, wet and flooded holes
- Use for static or quasi-static loads
- Versions in zinc plated steel and stainless steel A2 and A4
- Temperature range: from -40°C to +80°C (long term maximum temperature +50°C)

Applications

- Use in indoor and outdoor environments.
- Structural applications.
- For fixing stone cladding.
- Rehabilitation of facades.
- For fixing notices, air conditioning supports, boilers, awnings, signs, balconies, shelving units, railings, etc.

M0-PSP - Styrene Free Polyester



410 ml



300 ml

Characteristics

- Assessed for all types of concrete, non-cracked, masonry and all concrete applications
- Assessed studs from M8 to M24.
- Use for medium-high loads.
- Styrene free.
- Valid for dry, wet and flooded holes.
- Use for static or quasi-static loads.
- Versions in zinc plated steel and stainless steel A2 and A4.
- Temperature range: from -40°C to +80°C (long term maximum temperature +50°C).

Applications

- Use in indoor and outdoor environments.
- Structural applications.
- Fixing of building substructures.
- Rehabilitation of facades.
- For fixing air conditioning supports, boilers, awnings, garage door frames, signs, balconies, shelving units, railings, handrails, etc.

MOH - Styrene-Free Hybrid Resin



410 ml

300 ml


Characteristics

- Assessed for all types of concrete, cracked and non cracked, masonry and all concrete applications.
- Certificate of contact with drinking water (WRAS).
- Fire resistance certificate for studs and rebar (IBMB).
- Assessed studs from M8 to M30, even M27.
- Rebar used as stud from Ø8 to Ø32.
- Post-installed rebar Ø8 to Ø25.
- Use for high loads.
- Styrene free.
- Valid for dry, wet and flooded holes.
- Use for static or quasi-static loads.
- Versions in zinc plated steel and stainless steel A2 and A4.
- Temperature range: from -40°C to +80°C (long term maximum temperature +50°C).

Applications

- Use in indoor and outdoor environments.
- Structural applications
- Fixing of building substructures.
- Rebar and start rebar.
- For fixing enginery, balconies, awnings, shelving units, billboards, catenaries, safety barriers, railings, handrails, etc.
- Large metric sizes, retaining walls.

MOPURE - Pure Epoxy

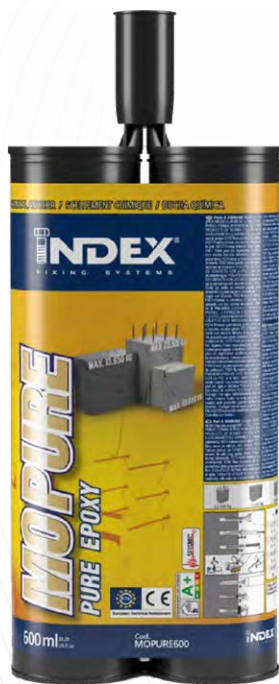

Characteristics

- Assessed for all types of concrete, non-cracked, masonry and all concrete applications
- Assessed studs from M8 to M24.
- Use for medium-high loads.
- Styrene free.
- Valid for dry, wet and flooded holes.
- Use for static or quasi-static loads.
- Versions in zinc plated steel and stainless steel A2 and A4.
- Temperature range: from -40°C to +80°C (long term maximum temperature +50°C).

Applications

- Use in indoor and outdoor environments.
- Structural applications.
- Fixing of building substructures.
- Rehabilitation of facades.
- For fixing air conditioning supports, boilers, awnings, garage door frames, signs, balconies, shelving units, railings, handrails, etc.

MOPUR-3 Pure Epoxy 3:1



Characteristics

- Assessed for all types of concrete, non-cracked, and all concrete applications. Valid for hollow and solid masonry
- Assessed studs from M8 to M24
- Use for medium-high loads
- Valid for dry, wet and flooded holes
- Use for static or quasi-static loads
- Versions in zinc plated steel and stainless steel A2 and A4
- Temperature range: from -40°C to +80°C (long term maximum temperature +50°C)

Applications

- Use in indoor and outdoor environments.
- Structural applications.
- For fixing stone cladding.
- Rehabilitation of facades.
- For fixing notices, air conditioning supports, boilers, awnings, signs, balconies, shelving units, railings, etc.

CARTRIDGE CHEMICAL ANCHORS

MO-PIS Guns

CODE	MODEL	CARTDRIDGE SIZE
MOPISTO	Manual	410 mL.
MOPISPR	Professional	410 mL.
MOPISSI	Silicone	170mL. / 300 mL.
MOPISPUR6	MOPURE600	600 mL.
MOPISNEU	Pneumatic	410 mL.
MOPISP3385	MOPUR30385	385 mL.
MOPISP3585	MOPUR30585	585 mL.



MO-ES Stud Bolt

CODE	MODEL
MOES06070	M6 x 70
MOES08110	M8 x 110
MOES10115	M10 x 115
MOES12110	M12 x 110



SEMI-AUTOMATIC, WIRELESS, GAS-ACTUATED NAIL GUN SHOOTEX 60

Gun Supplied With Complete Kit Case

TOOL CASE CONTENT

- SHOOTEX60 Gun
- Charger
- 2 batteries
- Safety glasses
- Allen key
- User manual



Applications

- Direct anchoring technique for light fixings: organising cabling, positioning of metallic profiles for the installation of plasterboard walls, etc.
- Fixing of metal or wood to concrete or blocks.
- Gun supplied with complete kit case, including battery charger.
- Long-lasting batteries.
- Suitable for nails up to 58 mm. long.
- Gas charge supplied with consumables.

FG-CLH Nails for hard materials

GAS

CODE	SIZE
FGCLH17	3,1 x 17
FGCLH19	3,1 x 19
FGCLH22	3,1 x 22
FGCLH27	3,1 x 27
FGCLH32	3,1 x 32



RIVETERS

RM-MA

Hand tools for blind rivets



0,524
Kg

Capacity
2.4 -4.8mm

RM-PA

Long arm rivets



1,865
Kg

Capacity
3.2-6.4mm

RM-EX

Lazy tong rivets



1,936
Kg

Capacity
3.2-6.4mm

RIVETS

RE-NO

Aluminium standard dome head

METAL



SIZE	DRILL Ø	MAX. FIXTURE THICKNESS
3,2 x 6	3,3	1 - 3
3,2 x 8	3,3	3 - 5
3,2 x 10	3,3	5 - 7
3,2 x 12	3,3	7 - 9
3,2 x 14	3,3	9 - 11
3,2 x 16	3,3	11 - 13
3,2 x 18	3,3	13 - 15
4 x 6	4,1	0,5 - 2
4 x 8	4,1	2 - 4
4 x 10	4,1	4 - 6
4 x 12	4,1	6 - 8
4 x 14	4,1	8 - 10
4 x 16	4,1	10 - 12
4 x 18	4,1	12 - 14

SIZE	DRILL Ø	MAX. FIXTURE THICKNESS
4 x 20	4,1	14 - 16
4 x 25	4,1	16 - 18
4 x 30	4,1	23 - 16
4 x 35	4,1	26 - 30
4,8 x 6	5	0,5 - 1,5
4,8 x 8	5	1,5 - 3,5
4,8 x 10	5	3,5 - 5,5
4,8 x 12	5	5,5 - 7,5
4,8 x 14	5	7,5 - 9,5
4,8 x 16	5	9,5 - 11,5
4,8 x 18	5	11,5 - 13,5
4,8 x 20	5	13,5 - 15
4,8 x 22	5	15 - 17
4,8 x 24	5	17 - 19



SIZE	DRILL Ø	MAX. FIXTURE THICKNESS
4,8 x 26	5	19 - 21
4,8 x 28	5	21 - 23
4,8 x 30	5	23 - 25
4,8 x 35	5	25 - 30
6 x 8	6,1	1 - 2
6 x 10	6,1	2 - 4
6 x 12	6,1	3 - 6
6 x 18	6,1	6 - 10
6 x 25	6,1	10 - 12
6 x 16	6,1	15 - 19

HEAVY DUTY METAL CLAMPS

	AB-RI	AB-RE	AB-RA	AB-IA	AB-IR	AB-GA
						
	P. 194	P. 195	P. 196	P. 196	P. 197	P. 197
SIZES (mm)	Ø 18 - Ø 1250	Ø 18 - Ø 1250	Ø 15 - Ø 125	Ø 15 - Ø 125	Ø 15 - Ø 60	Ø 18 - Ø 160
RECOMMENDED LOAD kg	150 - 200	150 - 200	80	80	80	80

AB-PE	AB-CH	AB-M8	AB-DE Z AB-DE G	AB-DP Z AB-DP G	AB-ZI	AB-SA	AB-GP
							
P. 198	P. 198	P. 201	P. 199	P. 199	P. 200	P. 200	P. 201
Ø 28 - Ø 220	Ø 28 - Ø 405	Ø 50 - Ø 315	Ø 75 - Ø 315	Ø 75 - Ø 250	Ø 16 - Ø 230	-	Ø 25 - Ø 235

AB-PE Sprinkler pipe clamp

SIZE	€/100
28	74,569
35	78,211
40	91,550
48	92,055
60	104,277
75	118,227
90	135,806
100	167,361
115	233,408
140	409,233
160	504,412
220	882,727



AB-CH Clevis hanger clamp

SIZE	€/100
3/4"	28
1"	35
1-1/4"	42
1-1/2"	48
2"	60
2-1/2"	75
3"	90
4"	115
5"	140
6"	160



SIZE	€/100
8"	220
10"	275
12"	325
14"	355
16"	405

NYLON CABLE CLIPS (POLYAMIDE 6.6), WITH STEEL ZINC-PLATED NAIL

GR-NY BL

White



SIZE
2 x 0,7
2 x 0,4 - 0,7 ó 1
2 x 1 - 3 x 0,7
2 x 0,7 - 2 x 1
2 x 1,5 - 3 x 1
3 x 1,5 - 3 x 2,5
1 x 1 - 2 x 0,5
2 x 0,75

SIZE
2 x 1
2 x 1-1,5
2 x 2,5
3 x 2,5
2 x 4
3 x 6
4 x 6

NYLON CABLE TIE

Characteristics

- Raw material : Polyamide 6.6. Halogen-free.
- High mechanical performance. High traction resistance.
- Complete range for all types of applications.
- Easy installation. Rounded tip to facilitate threading.
- High quality internal serration.
- CE Certification.
- UL Approval.
- Minimum installation temperature (-40°C).
- Working temperature: -40°C / +85°C.
- Installation temperature: -10°C ÷ / 60°C.
- Resistant to external agents.
- Visually attractive packaging



Applications

- Electrical installations.
- Industrial cabling.
- Automotive.
- Panel construction.
- Special applications.
- Outdoor installations.
- Photovoltaic installations.

BN-N

Black

MULTI-MATERIAL



SIZE	SIZE	SIZE
2,5 x 80	4,8 x 160	7,6 x 370
2,5 x 100	4,8 x 180	7,6 x 450
2,5 x 140	4,8 x 200	7,6 x 540
2,5 x 160	4,8 x 250	8,8 x 770
2,5 x 200	4,8 x 290	12,5 x 225
3,6 x 140	4,8 x 370	12,5 x 500
3,6 x 200	4,8 x 430	12,5 x 720
3,6 x 300	7,6 x 150	12,5 x 850
3,6 x 370	7,6 x 200	12,5 x 1000
4,8 x 120	7,6 x 290	



NYLON CABLE TIE

CHANNEL CANTILEVER ARMS

GP-X

SIZE	LENGTH
27 x 18 x 1,25 x 200	200
27 x 18 x 1,25 x 300	300
38 x 40 x 2 x 200	200
38 x 40 x 2 x 250	250
38 x 40 x 2 x 300	300
38 x 40 x 2 x 350	350
38 x 40 x 2 x 400	400
38 x 40 x 2 x 500	500
38 x 40 x 2 x 600	600



METAL



SP-X Indextrut

SIZE	LENGTH
41 x 21 x 2,5 x 150	150
41 x 21 x 2,5 x 300	300
41 x 21 x 2,5 x 450	450
41 x 41 x 2,5 x 150	150
41 x 41 x 2,5 x 300	300
41 x 41 x 2,5 x 450	450
41 x 41 x 2,5 x 600	600
41 x 41 x 2,5 x 750	750



METAL



SP-V Vertical

SIZE	SUITABLE FOR
SPV2718	27/18 - 28/30
SPV3840	38/40 - 40/20



METAL



SP-H Horizontal

SIZE	SUITABLE FOR
SPH2718	27/18 - 28/30
SPH3840	38/40 - 40/20



METAL



SP-HX Horizontal channels

SIZE	SUITABLE FOR
SPGH2718	27/18 - 28/30
SPGH3840	38/40 - 40/20 - 41/21 - 41/41



METAL



SLOTTED STRUT CHANNEL

GP-Z Zinc-plated

SIZE	LENGTH
20 x 10 x 1 x 2000	2.000
25 x 8 x 0,80 x 1000	1.000



METAL



GP-G Hot dip galvanized

SIZE	LENGTH
27 x 18 x 1,25 x 2000	2.000
28 x 30 x 1,8 x 2000	2.000
38 x 40 x 2 x 2000	2.000
40 x 20 x 1,50 x 2000	2.000



METAL



GP-A2 Zinc-plated

SIZE	LENGTH
27 x 18 x 1,25 x 2000	2.000
28 x 30 x 1,50 x 2000	2.000



STAINLESS STEEL



GP-PL Stainless steel A2

SIZE	LENGTH
27 x 18 x 1,25	1.000



METAL



GP-PVC PVC

SIZE	LENGTH
25 x 11 x 2 x 1000	1.000



METAL



SP-Z Zinc-plated

SIZE	LENGTH
41 x 21 x 2	3.000
41 x 21 x 2,5	3.000
41 x 41 x 1,5	3.000
41 x 41 x 2	3.000
41 x 41 x 2,5	3.000
41 x 21 x 2	3.000
41 x 41 x 2	3.000



METAL



CHANNEL BRACKET

EG-Z Zinc-plated

SIZE	SUITABLE FOR
50 x 50 45°	25/11 - 27/18 - 28/30 - 38/40 - 40/20 - 41/21 - 41/41
54 x 54 90°	25/11 - 27/18 - 28/30 - 38/40 - 40/20 - 41/21 - 41/41
100 180°	25/11 - 27/18 - 28/30 - 38/40 - 40/20 - 41/21 - 41/41

METAL



EG-A2 Stainless steel A2

SIZE	SUITABLE FOR
50 x 50 45°	27/18 - 28/30 - 38/40
54 x 54 90°	27/18 - 28/30 - 38/40
100 180°	27/18 - 28/30 - 38/40

STAINLESS STEEL



CHANNEL U-FITTING

PG-Z

SIZE	SUITABLE FOR
27 / 18 x 81	27/18
28 / 30 x 81	28/30
38 / 40 x 93	38/40

METAL



PG-A2

SIZE	SUITABLE FOR
27 / 18 x 81	27/18
28 / 30 x 81	28/30
38 / 40 x 93	38/40

STAINLESS STEEL



PLASTIC CAPS FOR FRAMING SYSTEMS

SO-TP

SIZE	SUITABLE FOR
27/18	27/18
28/30	28/30
38/40	38/40



METAL



CHANNEL STUD NUT

TO-GU

SIZE	SUITABLE FOR
M6 x 20	20/10 - 27/18 - 28/30 - 25/08
M8 x 20	27/18 - 28/30
M8 x 30	27/18 - 28/30
M8 x 30	38/40 - 40/20
M10 x 30	38/40 - 40/21



METAL



CHANNEL NUTS

TU-GU

SIZE	SUITABLE FOR
M6	20/10 - 25/8 - 25/11 - 28/30
M8	20/10 - 25/8 - 25/11 - 28/30
M8	27/18 - 28/30 - 38/40 - 40/20
M10	27/18 - 28/30 - 38/40 - 40/20
M8	Indextrut 41/41 - 41/21
M10	Indextrut 41/41 - 41/21



METAL



INDEXTRUT CHANNEL SPRING NUT

TU-MU

SIZE	SUITABLE FOR
M08	Indextrut 41/41 - 41/21
M10	Indextrut 41/41 - 41/21



METAL



FASTENERS



Nail Clamp



Grade	G.I, HDG
Size	0.5" - 8"
Application	GI Nail Clamps are widely used for pipe fitting purposes, for any kind of pipes such as water pipes, gas pipes etc.

Bolt



Grade	G.I, HDG, MS, SS304, SS316
Type	Full Thread, Half Thread, round headed, slotted, pan headed, square drive, Torx pin, clutch headed, Flang head and hexagon headed
	M6 - M40
	12 mm - 150 mm
Application	Used to hold materials or objects together, or to position objects

Nut



Grade	G.I, HDG, MS, SS304, SS316
Size	M6 - M40
Type	Hex Nut, Coupling Nut, Flange Nut, Dome Nut, Lock Nut, Slotted Nut, Wheel Nut Etc.
Application	Used to hold materials or objects together, or to position objects

Washer



Grade	G.I, HDG, MS, SS304, SS316
Size	M6 - M40
Type	Plain Washer, Wide Plain Washer, Lock Washer
Application	The main role of flat washers is to increase the size of a screw's bearing surface area, and reduce the surface pressure applied on the fastened object.

Spring Nut



Grade	G.I, HDG
Size	M6, M8, M10
Application	Spring nuts are one-piece, self-locking nuts that secure screws in strut channels.

Threaded Bar



Grade	G.I, HDG, MS, SS304, SS316
Size	M6 - M42
Length	2Mtr, 3Mtr
Application	Threaded bar allows for bolts and other types of fixings to be fastened onto the rod to suit many different construction applications like plumbing, trunking and duct installing etc

Foundation Bolt



Grade	G.I, HDG, MS, SS304, SS316
Size	M6 - M42
Type	J-Type, L-Type, Straight
Length	Custom Made
Application	Foundation bolts are used to connect structural and non-structural elements to concrete.

U Bolt



Grade	G.I, HDG, MS, SS304, SS316
Size	1/2" - 8"
Thickness	M6 - M10
Application	U bolts are typically used to support pipework or to attach a part to a pole, beam or wall, where the "u" shape keeps it firmly in place, adding stability to the support.

Roofing Nut & Bolt



Grade	G.I, HDG, SS304
Thickness	M4 - M10
Length	10MM - 25MM
Application	Roofing bolts have a large flat head and a threaded body, supplied with a square nut which is tightened when fixing. Their head allows them to spread the weight further than a standard bolt, making them suitable for fastening to thin materials without causing damage.

Lost Head Nail



Grade	G.I
Size	3/4" - 4"
Application	Lost head nails are ideal to use when an obtrusive finish is not desired. The small round heads are designed to be easily driven into the surface to give a flush finish to any joinery work

Wire Nail



Grade	G.I
Size	1" - 4"
Application	Wire nails can be used for general purpose fixing as well as the construction of roof trusses and pallets.

Steel Nail



Grade	G.I, High Carbon Steel
Size	1" - 4"
Application	Used in construction work for joining concrete, brick and cement structures, or in the home for fixing objects to walls or joining elements made of very hard types of wood.

Wood Screw



Grade	G.I, M.S, S.S, Brass, Brass Plated
Length	1/2" - 4"
Thickness	M4 - M12
Type	Full Thread, Half Thread, countersunk, round headed, slotted, pan headed, square drive, Torx pin, clutch headed and hexagon headed
Application	Wood screws are threaded fasteners that are used to join wooden workpieces.

Self Drilling Screw



Grade	G.I, S.S
Length	1/2" - 4"
Thickness	M4.8, M5.5, M6.3
Application	Self drilling screws have a point that acts as a drill bit and sharp cutting threads that tap the hole during installation. Self drilling screws are a commonly used variety of screw for quick drilling in metal.

Mirror Screw



Grade	Chrome plated, S.S
Length	25, 40, 50 mm
Thickness	M4, M6
Application	Mirror screws are ideal for fixing acrylic mirrors and glass mirrors to various surfaces.

Self Tapping Screw



Grade	G.I, S.S304, S.S316
Length	1" - 4"
Thickness	M3 - M6
Application	self-tapping screws are screws that have the ability to tap threads into the material. Self-tapping screws are used for all sorts of material including wood, metal, and brick

Drywall Screw



Grade	G.I, Black steel(Phosphate)
Type	Coarse & Fine Thread
Thickness	M6-M8
Length	1/2" - 4"
Application	drywall screws are specifically designed for fastening plasterboard to either metal or timber. Typically, drywall screws are light and have deeper threads designed to help the screws stay in place against the drywall

Fischer Plug



Grade	Nylon
Size	S-6,S-8,S-10,S-12,S-14,S-16
Application	Used when hanging or attaching items to solid masonry walls to ensure fixings are secure and firmly anchored into place

Wood Fastener



Grade	G.I
Size	1/2",3/8",5/8",3/4"
Application	Corrugated fasteners are primarily used such as with miter joints or butt joints. Applications include cabinet and furniture framing, picture frame assembly, wood box building, and pallet assembly and repair.

Wafer Head Screw



Grade	G.I, Black steel(Phosphate)
Size	13MM, 20 MM
Application	Wafer head screws are drill point fasteners for fixing drywall profiles one to the other providing a large holding surface or for accessory mountings on steel structures up to 2.5 mm thickness.

LADDERS AND SCAFFOLDINGS

A Type Ladder



Height
3 ft - 17 ft



▲ Dual Purpose Ladder (EDPL)



▲ Heavy Duty Twin Ladder (EHDTL)



▲ Light Duty Double Side Ladder (EDSL)



▲ Light Duty Emirates Step Ladder (ESL)

Straight Ladder



Height
6.6 ft - 20 ft



▲ Heavy Duty straight Ladder (EHSL)



▲ Heavy Duty Square Ladder (EHSQSL)

Multi Purpose Ladder



Height
8,12,16,19,23 ft



◀ Multi purpose ladder (MPL)

Extention Ladder



▲ Heavy duty Extention Ladder (EHEL)



▲ Heavy Duty Triple Extention Ladder(EHTL)



▲ Reform Ladder(RFL)



▲ Height
10.6 ft - 36.3 ft

Fiber Glass Ladder



▲ Fibre Glass Yellow/250LB(EFGL)



▲ Fibre Glass Red/300LB(EFGLA)



▲ Height
4 ft - 14 ft

Application

Fibreglass does not conduct electricity, it's the best choice for those working around power lines. While there are other non-conductive options available, like wood, fibreglass is stronger and weighs less – making it easier to lift, move and transport. also well suited for outdoor conditions

Podium Type Ladder



▲ Height
1.6 m - 2.5 m

Application

Podium steps are a safe way to access and work at low-level heights. These are a safer alternative to ladders as they are not only more stable but also provide guard rails for the user to ensure they are enclosed and secure on the platform

Aluminum Scaffolding Tower



Height
2 m - 15 m



▲ EMC-785 (Width : 785 mm, Length : 1750 mm)



▲ EMC-1350 (Width : 1450 mm, Length : 2500 mm)

Application

Mobile scaffolding is temporary support platforms that is based on wheels and is used for a multitude of purposes. Commonly used for construction tasks where workers need to change their position frequently, these movable structures are perfect for jobs like plastering, painting or any maintenance on a high elevated indoor/outdoor structure.

Cat Ladder



Height
Custom Made



Application

These fixed ladders come with a safety cage on the top that enable the person to easily climb down the sewerage system to access even the deepest manholes with ease. For a safe access into the sewer plants and other drainage holes, the fixed - wall mounting and manhole cat ladders are a great choice

Family Ladder



Height
2 ft - 8 ft



Application

Family Ladder is designed for general household application. Recommended for home use where a larger platform and elongated handle provides more security and safety measures.

PAINT ACCESSORIES



Putty Knife



Grade	S.S, Fiber
Size	2",4",6",8"
Application	Putty knives are used to apply and spread materials. Different widths have different uses; for example, a narrow blade may work for filling small nail holes in walls or wood. A wide blade is more appropriate for larger surfaces and is commonly used for drywall application and related services.

Hopper Gun



Grade	Nylon, Aluminum
Nozzle Size	4 mm, 6 mm, 8mm
Capacity	5 Ltr
Application	Applying external wall coatings, texture, silicone thin coat render, tyrolean and textured renders and masonry paints.

Paint Brush



Brand	Peta, Tower
Size	1/2"-4", 30 x 100 mm

Paint Roller



Brand	Peta, Tower
Size	4", 7", 9"
	Emulsion, Enamel, Texture (Fine, Medium & Heavy) Epoxy
	Paint application tool used for painting large flat surfaces rapidly and efficiently. The size and type of roller can heavily depend on the location you are working in.

Angle Brush



Size	1" - 3"
Application	The Angled Radiator Brush is ideal for use in confined spaces enabling easy access to usually difficult to reach places. The bristles of the Angled Radiator Brush are high quality offering excellent paint pick-up and distribution.

Artist Brush



Type	Flat & Round
Size	Used for working on a vertical canvas such as for oil paint or acrylic paint.

Paint Scraper



Grade	S.S
Size	1" - 10"
Type	wooden handle, Fiber handle
Application	used to remove old paint.

Extention Pole



Grade	Fibre, Aluminum
Size	3 m, 6 m
Application	Telescopic
	Expand the user's reach, making it possible to perform tasks that cannot usually be completed without using a ladder. Extension poles are commonly used for jobs such as cleaning, painting, and pruning.

Paint Try



Grade	Plastic
Type	Try type & Handy cup type
Application	Using a paint tray not only extends the life of your can of paint, it also allows you to use a paint roller for easy application of paint. Rather than dipping a brush into your paint can, pour a small amount into a paint tray.

Spike Shoe



Grade	Nylon, Aluminum
Nozzle Size	4 mm, 6 mm, 8mm
Capacity	5 Ltr
Application	Applying external wall coatings, texture, silicone thin coat render, tyrolean and textured renders and masonry paints.

Gypsum Tape



Brand	Fiberglass
Size	50 mm
	45 m, 90 m
Application	Used to provide greater drywall joint strength, used to cover seams in the process of drywall construction. This product has good performances like good softness, high stickiness, and easy application.

Drop Polyethene Sheet



Grade	LDPE
Size	4 x 5 m, 4 x 12.5 m
Application	It is often used as a dust cover or for protection when painting or spraying.

Spike Roller




Grade	Nylon
Size	10"
Application	11 mm spike
Application	Spiked rollers are designed to be used on freshly applied floor coatings for the purpose of releasing trapped gas and expelling air bubbles.

METAL PROFILE



Plastering Mesh & Accessories

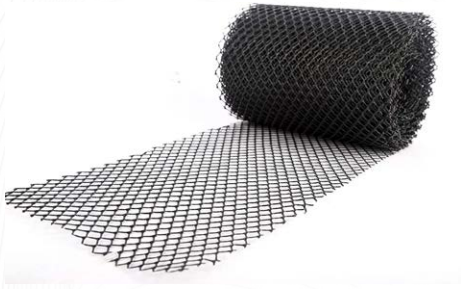


Grade	ASTM A653/A653M
Size	4",6",8"
Length	25 m, 50 m
Application	Used in block works where extra strength and stability are required as on footings, parapets and localized stress areas. Block works with mesh reinforcement helps the walls to resist stress caused by vibrations and thermal changes.

Butterfly Wall Ties



Grade	SS304, G.I
Size	75 x 200 mm
Color	3 mm
Application	Used to connect cavity brick walls. It is suggested to use 3-4 Butterfly Wall ties per m2.

Chicken Mesh

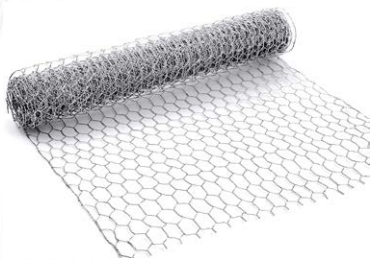


Grade	G.I & SS304
Size	3 & 4 Ft
Thickness	0.5 mm
Length	25 m
Application	Chicken mesh has the same function as reinforcement does in concrete. It strengthens the plaster against forces. Mainly to avoid the crack formed due to insufficient gap filling between RCC column & Brick wall joint.

Fishtail Wall Tie



Grade	GI, SS
Width	20 - 25 mm
Thickness	1.5 - 3 mm
Length	200 - 250 mm
Application	These ties allow masonry walls to be tied back to other structures, (steelwork or masonry) providing restraint in one direction but allowing movement in the other.

Twisted Cavity Wall Tie

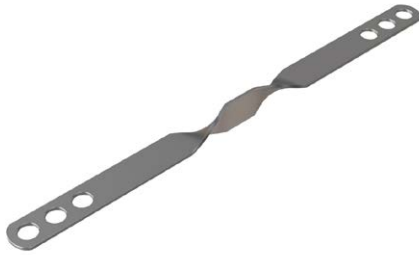


Grade	GI,SS
Size	20-25 mm
Thickness	1.5-3 mm
Length	50-200 mm
Application	Used to tie the internal and external walls (or leaves) constructed of bricks or cement blocks together, making the two parts to act as a homogeneous unit. It is placed in the cavity wall during construction and spans the cavity.

Corrugated Wall Ties



Grade	GI, SS
Size	1"
Thickness	1 mm
Length	150-200 mm
Application	The Corrugated Wall Tie is for anchoring wood stud to masonry. This product is only recommended for use in residential construction.

Corner Bead

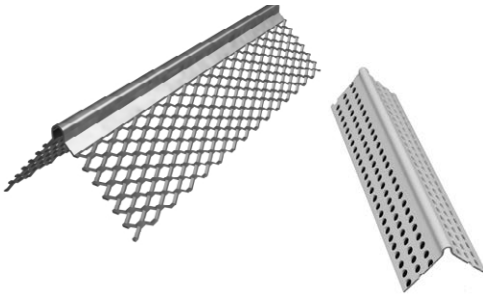

Grade	GI, SS, PVC
Size	1"x1", 2"x2"
Length	8 Ft
Application	Corner bead is used in drywall finishing for two reasons: to stabilize and reinforce corners and to cover the visible seam between the two separate drywall boards, creating a seamless 90-degree angle.

Stop Beads



Grade	GI, SS
Size	1"x2", 2"x2"
Length	8 Ft
Application	Stop Beads are used with render and plaster at junctions of walls, soffits, ceilings and surrounds to openings. Stop Beads are designed to finish and protect plaster edges.

PACKAGING



Steel Bindings



Size	5/8" , 3/4"
Application	Packing/Binding large objects

Plastic Bindings



Size	1/2" , 5/8"
Application	Packing/Binding cartoons or pallets

Aluminum Tape



Thickness	2",3",4"
Length	20 Yrd, 30 Yrd, 50 Yrd
Application	This tape is commonly used to secure duct seams, connections, and joints. Additionally, it has excellent waterproof properties.

Masking Tape



Thickness	1".11/2", 2"
Length	20 Yrd
Application	Masking tape is used to seal and close areas that do not need painting. The tape can then be easily removed as soon as the paint dries making the task easy and clean. Another adopted use is in the labeling of stuff.

Densyle Tape



Thickness	2", 3", 4", 6"
Length	10Mtr
Application	Densyle Tape is a cold-applied anti-corrosion and sealing tape based on a synthetic fabric, impregnated and coated with a neutral petrolatum compound. The tapes provide long term corrosion protection to pipes, flanges, valves and related surfaces.

PVC Tape



Type	Clear,Brown
Thickness	2",4"
Length	50 Yrd, 80 Yrd
Application	PVC tapes are thick and strong premium quality packaging tape designed to accommodate heavy-duty shipments.

Foam Tape



Grade	XPE
Size	2"-4"
Thickness	3 mm
Length	7.5 Mtr
Application	Foam tape is used for tasks including gasketing, insulating, draught-sealing, cushioning, and sound dampening. Double-sided foam tape can also be used to bond two materials or surfaces together.

Mounting Tape



Thickness	1", 2"
Length	10 Mtr
Application	These tapes are primarily used to stick two surfaces together but can also be used to mount a small item onto another surface such as a wall or vehicle body.

Shuttering Tape



Thickness	2"
Length	30 Yrd
Application	Shutter Tape is a pvc tape used for the sealing of joints in form work to prevent grout loss

Duct Tape



Thickness	2", 4"
Length	20Yrd, 30Yrd
Application	Multipurpose and is used for general sealing, patching holes, packing boxes and repairs. Some duct tape can also stick to rough and uneven indoor and outdoor surfaces such as wood, stone, plaster, brick and metal.

Insulation Tape



Grade	20 mm
Size	20 Mtr
Application	Used to insulate electrical wires and other materials that conduct electricity.

Cotton Rope



Thickness	6 mm - 20 mm
Length	30 Yrd - 50 Yrd
Application	Cotton is the softest of the natural fibers used for rope, making it the best solution for avoiding the abrasion or discomfort caused by other types of rope.

Nylon Rope



Thickness	1".11/2", 2"
Length	20 Yrd
Application	Used in packing, electrical cable lining, pulling goods and equipments Etc

Polypropylene Rope



Thickness	6 mm - 24 mm
Length	200 Mtr
Application	The rot-proof and water-resistant properties of polypropylene make it an ideal option for situations where a rope is likely to get wet (such as onboard a boat or ship) and, for this reason, it is often used as an anchor line, winch, or life rope.

Manila Rope



Thickness	6 mm - 24 mm
Length	30Mtr - 100Mtr
Application	Manila rope is very durable, flexible, and resistant to salt water damage, allowing its use in rope, ships' lines, and fishing nets. It can be used to make handcrafts like bags, carpets, clothing, furniture, and hangings.

Tarpaulin



Grade	Woven LDPE,Canvas.
Size	12x12 Feet - 60x60 Feet
Thickness	70 GSM - 700 GSM
Application	Tarps are used extensively to provide protective and water-proof shelter, and covering for equipment, stores, provisions, firewood, fire itself - and many more things.

Stretch Film



Grade	LLDPE Stretch Film Manual Grade
Size	500 mm
Thickness	130 Mtr
Application	Stretch films or wraps are stretchable plastic films that are used to wrap a product to keep them in place securely. They are commonly used in shipping pallets to keep products and boxes locked-in during shipping.

WHEEL & ACCESSORIES



Castor Wheel



Grade	Rubber
Size	25 mm - 200 mm
Type	Fixed, Swivel, With & Without Break
Application	Castor wheels are used in numerous applications, including shopping carts, hospital beds, material handling equipment, platform trucks, carts, assemblies, and tow lines in plants.



Grade	Cast Iron
Size	25 mm - 200 mm
Type	Fixed, Swivel, With & Without Break
Application	Cast Iron wheels provide high capacity with low rolling resistance. They are hard wearing, as well as abrasive and heat resistant. They can be used for high load bearing applications in which loads are left standing for extended periods as they will always be ready to roll as they have low rolling resistance. Major applications are in autoclaves, bakeries, smokehouses, curing ovens, and mobile powder coating racks. Manufacturing applications, such as aerospace, tire, automotive, construction, and heavy farm equipment.



Grade	Polyurethane
Size	25 mm - 200 mm
Type	Fixed, Swivel, With & Without Break
Application	Polyurethane wheels are more durable and have a longer lifespan than rubber wheels. They also provide better shock absorption and are quieter, making them ideal for carpeted floors. Polyurethane wheels are also resistant to chemicals, oils, and grease, which can cause damage to rubber wheels.



Grade	Nylon
Size	25 MM - 200 MM
Type	Fixed, Swivel, With & Without Break
Application	Nylon castor wheels are used for particularly in areas where hygiene is important, such as the food industry, laboratory equipment, Dairy farm & automotive industry. They are also commonly used for stainless steel containers or machinery which is normally left in a stationary position.

Scaffolding Wheel



Type	Rubber (Fixed)
Size	160 mm, 200 mm
Application	Scaffolding caster wheel is the functional units of any scaffolding system to move the system.




Type	Poly urethane (Adjustable)
Size	200 mm
Application	Allows mobile scaffold towers for maximum portability. Easy attachment allows for tower movement across a worksite without dismantling. A heavy-duty lockable brake offers stability and prevents unwanted lateral movement when atop a mobile tower. Each wheel has an adjustable height for tailoring scaffolding to each specific worksite. PU material provides high durability.

WATER HOSES



Water Hoses

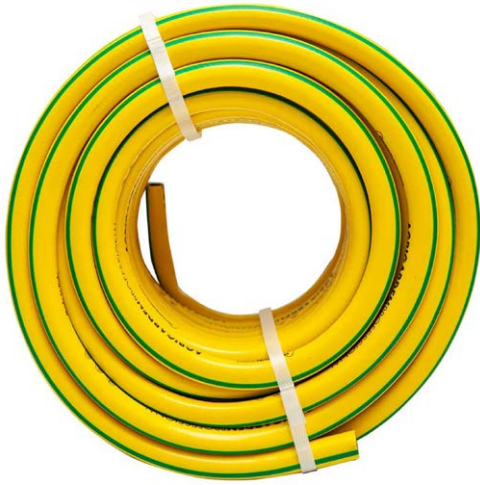

Type	Garden Hose (Yellow/Green)
Size	1/2",3/4",1"
Length	25,50 MTR
Application	Garden hoses are made of PVC , it consists of two layer with fibre reinforcement.Widely used in construction, agricultural,fishery, project, household and industrial service



Type	Reinforced Hos
Size	1/2",3/4",1",1 1/2",2"
Length	25,50 MTR
Application	Reinforced hoses are normally transparant, singly core reinforced with fibre. Widely used in construction, agricultural,fishery, project, household and industrial service



Type	Suction Hose
Size	1 1/2",2",3",4",6"
Length	25 MTR
Application	Suction hoses are normally in green color, single core reinforced with metal/fibre. Suction hoses are used under negative pressure to remove materials. Widely used in Water transport,waste product line,dairy processing,agricultural,fishery, and industrial service



Type	Flat Hose
Size	2",3",4",6",8"
Length	80 MTR
Application	PVC flat hose is also called as water discharge hose ,designed for light and heavy duty applications, It's mostly used in agricultural equipment that require continuous water flow through irrigation systems. Other appliactions include water pump, pool & spa, construction, mines and marine.



Type	FITT Yoyo
Size	1/2"
Length	15 Mtr
Application	FITT Yoyo is the red, light, compact and multi-purpose hose that comes with its own fittings and multi-jet spray gun.The ideal choice, not just for watering terraces and small gardens, but also for cleaning outdoor spaces, washing car,bicycle and even dog.The Aquastop system prevents unpleasant water spills, making it possible to also use indoors.As it fills with water, FITT YOYO extends to about twice its normal length, to then return to its original size after use

PIPE FITTINGS



Pipe Fittings



Pipe fittings are components used to join pipe sections together with other fluid control products like valves and pumps to create pipelines. The common connotation for the term fittings is associated with the ones used for metal and plastic pipes which carry fluids. There are also other forms of pipe fittings that can be used to connect pipes for handrails and other architectural elements, where providing a leak-proof connection is not a requirement. Pipe fittings may be welded or threaded, mechanically joined.

Grade	ASTM A536
Type	Threaded
Size	1/2" - 6"
Metal	MS, GI, D.I
Application	Threaded fittings are mainly used for small pipe diameters, generally for piping whose nominal diameter up to 6"



Grade	ASTM A536
Size	1" - 8"
Type	Grooved
Metal	D.I
Application	Grooved pipe couplings and fittings are used to join pipes in both wet and dry system. They provided some flexibility in terms of movement and deflection to the piping system.



Grade	ASTM A536
Size	1" - 8"
Type	Mechanical
Application	They are widely used on larger steel pipes and can also be used with other materials.

Hose Fittings



Size	1/2" - 8"
Type	PVC, GI, SS, Brass, CP
Application	Hose connectors are couplings used to securely and robustly attach hoses to water and pressurised air outlets of various types

Saddle Clip



Grade	G.I, HDG, SS304
Size	0.5" - 8"
Application	Fasten metal pipes used for water or gas line installation, or resin cable conduits for electrical work.

Kim Nipple



Grade	G.I, Chrome plated, Brass
Size	0.5" - 6"
Application	Also known as combination nipple, mainly used as Convey Water, Oil, Gas, Steam and so on from any mechanical part through hose pipe.

Nipple



Grade	G.I, Chrome Plated, M.S.S.S
Size	0.5" - 4"
Application	Nipple is a short piece of pipe. A nipple is usually provided with a male pipe thread (MPT) connection at each end of the fitting, which are used to make a watertight seal when connecting piping to threaded fittings, valves or equipment.

Plug



Grade	G.I, M.I, M.S
Size	0.5" - 4"
Application	Plug which can be used for closing one end of the pipe.

Reducer Bush



Grade	G.I, M.I, M.S
Size	0.5" - 4"
Application	Reducer bushings are used to connect metal pipes with two different diameters by reducing the inner diameter of the pipe

Reducer Elbow



Grade	G.I, M.I, M.S
Size	0.5" - 4"
Application	Reducer elbows are used to connect pipes of varying diameters. The primary function of reducer fittings like the reducer elbow is to regulate the flow of water by phasing water flow from a larger to a smaller pipe.

Reducer Socket



Grade	G.I, M.I, M.S
Size	0.5" - 4"
Application	Reducing sockets are used to join together two pieces of pipe of different diameters.

Reducer Tee



Grade	G.I, M.I, M.S
Size	0.5" - 4"
Application	Reducing tee is in the shape of T with two ends of equal size and the third one slightly smaller. In other words, reducing tee is a type of pipe fitting in which the branch port size is smaller than the ports of the run.

GI Tee



Grade	G.I, M.I, M.S
Size	0.5" - 6"
Application	GI Tee are T-shaped made of iron where two horizontal pipes and one vertical pipe can be joined.

Union



Grade	G.I, M.I, M.S
Size	0.5" - 6"
Application	Union is a threaded fitting which allows the pipe work to be separated and reconnected without any horizontal movement in the pipe. It can be a standalone pipe fitting connecting two pieces of pipe, or an integral part of another fitting (such as a ball valve) which allows it to be separated.

Jute



Grade/Pattern	Raw, Natural jute color
Pack Size	As per demand
Application	In order to prevent leakage, jute wound around the threads at the end of each pipe. This type of joint mostly used for pipes carrying water at low pressure and where the overall smallness of size is most essential.

MISCELLANEOUS HARDWARE



Broom



Grade	Hard, Soft
Size	29 x 7 cm, 34 x 4 cm
Thickness	6 Rows
Application	Cleaning

Permanent Marker



Color	Black, Red, Yellow, Blue etc.
Application	Used to create permanent or semi-permanent writing on an object
Length	50 Yrd, 80 Yrd

Sharpening Stone



Grade	2000 Grit
Size	2" x 8"
Thickness	30 mm
Application	longstanding tool used to sharpen blades by grinding them against an abrasive surface

Water Filter



Grade	1 Stage, 2 Stage & 3 Stage
Size	5"x15"
Application	Water filter removes all impurities and other organic substances from your drinking water.

Water Cooler



Capacity	2, 3, 5, 10 & 15 USG
Color	Blue, Green, Red, Orange
Make	Cosmoplast
Application	Thick polyurethane insulation portable water coolers gives up to 8 hours of beverage temperature retention.

Jerry Can




Grade	Non Food Grade
Capacity	20 LTR
Color	Military Green
Application	jerry can is a container used for efficient fuel transportation

Roofing Tiles




Color	Red
Size	9"x15.5"
Make	India
Application	Roofing of parkings, farm house Etc.

Wood Partition

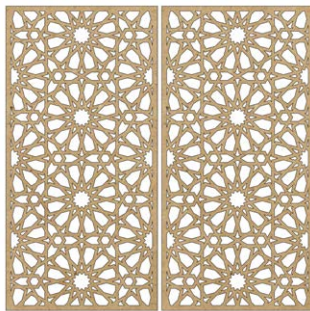

Grade	Kiln Dried
Size	500X2000 MM
Thickness	15, 20 MM
Application	Wood partitions create special visual effects in a house, office, a co-working space or a commercial area.

Fencing

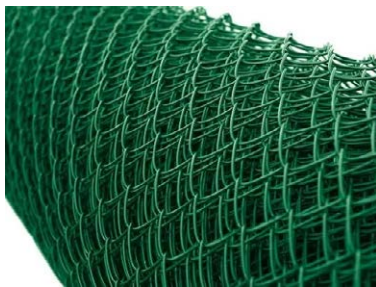

Grade	BS4102
Size	1x1", 11/2x11/2", 2x2", 3"x3"
Thickness	1.6 - 4 MM
Width	1.5, 1.8, 2 m standard, Customized width available
Length	10 & 15 m Standard, Customized length available
Application	Boundaries and borders of Farm, Park, School, Playground, open land, Poultry house etc. can be enclosed with fencing

Chain



Grade	G.I, S.S, M.S
Thickness	4, 6, 8 & 10 MM
Length	6 - 10 MTR
Application	GI Chain is used as mooring or anchoring chain, lashing chain, playground equipment, gymnasium chain and general use.

File



Grade	Hardened Steel
Size	4" - 12"
Type	Flat, Round, Half Round, Triangular Etc.
Application	used for smoothing or forming objects, especially of metal.

Garden Rack



Color	10, 12, 14 & 16 Teeth
Application	scooping, scraping, gathering, or leveling materials, such as soil, mulch, or leaves.
Length	50 Yrd, 80 Yrd

Industrial Socket



Power	16A, 32A (3 PIN)
IP Rating	IP 44
Application	It is an industrial Purpose used Top & Plug with Safety Purpose benefits.

Pully



Grade	Cast Iron
Size	4", 5", 6", 8"
Application	A rope pulley is a system that uses fiber ropes and wheels made of plastic, metal, wood, or other materials to lift or move objects

Wire Brush



Capacity	G.I, S.S, Brass
Color	12"
Make	4 Row, 5 Row
Application	Used for the removal of rust and oxidations, paint, slag, weld splatter and other unwanted surface

Wire Rope




Grade	G.I, SS316
Capacity	2 mm - 50 mm
Color	100 & 150 MTR Standard. Custom length also available
Application	Used dynamically for lifting and hoisting in cranes and elevators, and for transmission of mechanical power.

Wire Rope Clip



Grade	G.I, SS316
Size	2 mm - 50 mm
Application	They are used to form a wire rope eye or to connect two cables together.

Bird Spike

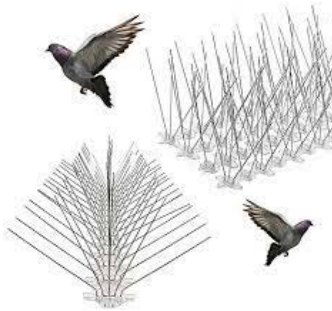

Grade	SS304
Size	5X15 Spike
Thickness	1.5 mm
Application	60 cm
	Bird spikes can be attached to building ledges, street lighting, and commercial signage to prevent wild or feral birds from perching or roosting.

Bird Repellent Gel




Grade	310 ml
Size	transparent sticky gel used to deter pigeons and starlings from landing on surfaces. It is applied on bird resting places, such as window sills, roof ridges, gutters, parapets and ledges.

Aluminum Fly Screen



Grade	6063
Size	11/2"x3", 11/2"x4", 2"x4"
Thickness	1.5 mm, 2 mm, 2.5 mm
Length	20 Ft
Application	Used for windows and doors to stop the flying insects.

Aluminum shelf Bracket

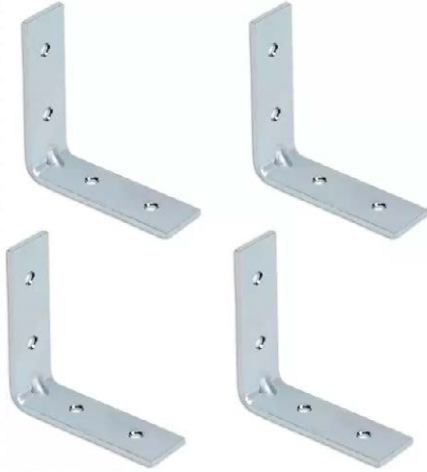

Grade	6063
Size	1x1", 1 1/2x1 1/2", 2x2"
Thickness	2 mm, 3mm
Application	Shelf bracket and support
Grade	
Size	
Thickness	
Length	
Application	

Wiper



Size	14"
Application	Used clean and wipe of water in floor.

Carpentry Pencil



Application	Carpenter pencils are used for mark on surfaces like concrete or stone
-------------	--

Welding Marker



Application	Ideal for fine line marking during metal layout and fabrication, these highly visible marks illuminate when cutting or welding
-------------	--

BUILDING SUPPLIES





Cotton Rags



Grade	Grade A, Lint free
Type	White, Assorted Colors
Pack Size	10 kg, 25 kg, 50 kg
Application	Industrial wiping

Rush Machine



Grade	SS304
Make	Italy
Application	Apply textured coatings to interior and exterior walls.

Nail Puller



Size	18",24",30",36"
Application	A nail puller is a simple tool specially designed to pull nails from wood

Pick Axe



Grade	1.5 kg, 2 kg, 2.5 kg
Make	wooden handle, Fiber handle
Application	A pick axe is mainly used for breaking up hard ground or rock in farming and landscaping.

Crow Bar



Size	3 ft, 4 ft, 5 ft, 6 ft
Application	Used in a lever action for prying and demolishing, and for prying items apart again with the action of levering.

Flooring Plastic Spacer



Size	25/8-24, 30/8-24, 40/8-24, 50/8-24, 30/6-18, 50/6-16
Type	NORM, Clothspin
Application	Spacers ensure the concrete cover before and during concreting. In the case of simple interior components, plastic spacers are a cost-effective alternative to the tried and tested fibre-reinforced concrete spacers and to spacers made of cast concrete.

Tile Spacer



Material	PVC
Size	1.5 mm, 2 mm, 2.5 mm, 3mm, 4mm, 5mm
Application	Straight and even Wall & Floor tile fixing

Fibre Concrete Spacer



Method of Production	ASTM C 109/C 109M-20B
Size	20, 25, 30, 40, 50, 60 & 75 mm
Width	24 mm
Application	Maintain nominal distance between the reinforcement and formwork before and after concreting

Brass Plum Bob



Weight	300, 400, 500, 600, 800 & 1000 Grams
Application	Civil Block & Plastering works

G.I Binding Wire



Grade	Electric Galvanized
Make	5 kg, 8 kg, 9 kg, 10 kg
Application	16 G, 18 G, 20 G
	Construction sector for tying the rebars at the junctions/joints

Black Annealed Binding Wire



Grade	Annealed
Weight	5 Kg, 10 Kg
Thickness	16 G, 18 G
Application	Construction sector for tying the rebars at the junctions/joints

Plastering Trowel



Grade	Steel, PVC
Size	14 x 28 x 2CM, 28 x 13 x cm x 0.7 mm
Application	Civil Block & Plastering works

Column Clamp



Grade	Mild Steel (M.S)
Size	70, 80, 90, 100, 120 cm
Thickness	6 mm
Application	Rapidly and rigidly clamping of temporary concrete column formwork

Rapid Clamp



Grade	Cast Iron
Size	115 x 54 mm
Thickness	10, 12 mm
Application	Rapidly and rigidly clamping of temporary concrete column formwork

Mason Trowel



Grade	Carbon Steel
Size	4", 6", 8"
Thickness	16 G
Application	The Masonry trowel is a hand trowel used in brickwork or stonework for leveling, spreading and shaping mortar or concrete

Tile Polishing Stone



Grade	0, 1, 2, 3, 4, 5
Application	Cleaning and polishing marble, stone and tile surfaces.

Backing Rod



Grade	Closed Cell P.U
Size(Dia)	12, 15, 18, 20, 25, 30, 40 & 50 mm
Length	100, 200, 360 & 800 m
Application	Backer rods are usually round, flexible lengths of foam that are used as a "backing" in joints or cracks to help control the amount of sealant/caulking used and create a back stop.

White Cement



Grade	EN 197-1 (CEM-1 52.5N&CEM-2 42.5N)
Pack Size	40 Kg, 50 Kg
Make	JK Cement, Iran
Application	White cement is typically specified to ensure clean, bright, consistent colors, including light pastels. White cement allows a wide range of color options for producing structural and architectural concrete, as well as masonry and cementitious building products

Gypsum Powder



Color	White
Purity	90+
Pacaking	30 Kg
Make	Emmar, GGC (Oman)
Application	Gypsum powder is mainly used for plastering ,moulding sculptures Etc.

Hessian Cloth



Grade	7 OZ
Thickness	2.5 mm
Pack Size	10 Kg, 50 Kg, 70 Kg
Application	It is often used in the construction industry to protect brick-work, mortar and concrete during the cold period. In summer hessian can be wetted, to stop concrete or cement from drying too quickly.

Chalk



Color	White, Assorted Colors
Pack Size	100 Nos
Application	Chalk is widely used for marking Roads, Concrete, Bricks etc. where a permanent mark isn't needed and/or the marks need to be washed away.

Line Dori



Grade	Nylon Twisted
Size	120, 180 & 200 gm
Color	White & assorted colors
Application	Line Dori is a Nylon thread used to align the wall, beam, and other building elements during construction.

Plastic Bucket




Grade	HDPE
Capacity	12 LTR
Make	Italy, Oman
Color	Black, Yellow, Orange
Application	Mason buckets are used in masonry, normally used for carrying sand, cement, concrete, mortar, water etc.

Mal Mal Cloth



Grade	Pure White Malmal
Size	36" x 5 yards
Application	Cleaning, polishing etc.

Polythene Sheet

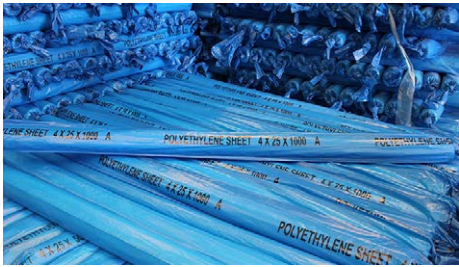

Grade	ASTM D 638/882
Width	4 m
Thickness	200, 500, 1000, 1200 Gauge
Length	25 m
Application	It is used in construction as vapor retarders, flooring and counter top protection, seal off rooms, cover building materials etc.

PVC Chamber



Grade	20 x 20 mm, 25 x 25 mm
Pack Size	2 m
Make	PVC Chamfers provide smooth and professional finish for all right angle material intersections. e.g. corners, walls, columns and beams etc.

Tierod & Accessories



Size	16 mm
Length	6 m
Accessories	Wing Nut, Washer & Connector
Application	Tie rods are often used in steel structures, such as bridges, industrial buildings, tanks, towers, and cranes. Sometimes tie rods are retrofitted to bowing or subsiding masonry walls (brick, block, stone, etc.) to keep them from succumbing to lateral forces.

Wheel Barrow



Thickness	0.8/1.2 mm
Capacity	90 Ltr
Wheel	Rubber Solid Bearing Wheel
Application	Wheelbarrows are used for a variety of things, such as moving rock, mulch, or compost to the garden, hauling bricks, disposing of garden debris, or even for mixing concrete or fertilizers

Hand Trolley



Make	Tunali, Turkey
Capacity	200 Kg
Application	Transporting barrels, gas cylinders, bags, etc

Sand Mesh



Grade	G.I, SS304, SS316
Width	3 & 4 ft
Thickness	0.6 mm
Length	20 Feet
Application	Screening, sizing, grading, shifting, separating, and washing of particles in construction, Food processing, Pharmaceuticals

Scaffolding Coupler



Standard	BS1139 & EN74B
Size	1 1/2", 2"
Application	Scaffolding couplers are majorly used most for construction building work components. As the main purpose of using the couplers are to make the proper connection or the installation of the scaffolding at the workplace, also used for relying on the friction between the connector and the steel pipe to transfer the weight load from another place.

Water Tank



Grade	PVC - 2 Layer, 3 Layer
Capacity	100 - 5000 USG
Type	Vertical, Horizontal
Application	Used to store water for household, agricultural, irrigation, and industrial manufacturing use.

Septic Tank



Grade	PVC, GRP
Size	800 USG - 25000 USG
Application	Septic tank is basically an underwater sedimentation tank used for wastewater treatment through the process of biological decomposition and drainage.

GRP Tank



Type	Cylindrical, Rectangular, Pannel Type
Orientation	Vertical, Horizontal
Size	800 USG - 13000 USG
Application	Used to store large volume of water for commercial, agricultural, and industrial manufacturing use.

Aluminum Manhole Cover



Custom Made also available

Grade	Aluminium
Size	45 x 45 cm, 60 x 60 cm, 80 x 80 cm
Thickness	48 mm
Application	Aluminium manhole covers are used in industrial and public facilities: in shops, exhibition halls, restaurants, workshops, and warehouses, wherever access to underfloor installations is required. Floor tiles, terracotta or other materials can be used as finishing material of the upper part of a manhole cover.

Aluminum Angle



Grade	6063
Size	1"x1", 1 1/4"x1 1/4", 1 1/2"x1 1/2", 2"x2", 3"x3"
Thickness	1.2MM, 1.5MM, 2MM, 3MM
Length	12 Feet, 20 Feet
Application	Construction appliances, Architectural trim, Racks, Automotive appliances, Machine parts & Fabrication.

Aluminum Flat Bar



Grade	6063
Size	1/2", 3/4", 1", 1 1/4", 1 1/2", 2", 3", 4", 6"
Thickness	1.5 mm, 2 mm, 2.5 mm, 3 mm, 4 mm, 5 mm
Length	12 Ft, 20 Ft
Application	Construction appliances, Architectural trim, Racks, Automotive appliances, Machine parts & Fabrication.

Aluminum Plaster Float



Grade	6063
Width	1 1/2"x3", 1 1/2"x4", 2"x4"
Thickness	1.5 mm, 2 mm, 2.5 mm
Length	20 Ft
Application	Plastering Tool, Fabrication etc.

Noora Brush



Standard	6"
Size	Mainly used in masonry works.

OUR BRANDS



global
gypsum

ARTCO[®]



TREVITECH[®]
A MADE IN ITALY COMPANY

TREVITECH[®]
A MADE IN ITALY COMPANY

ARMAMIX[®]
ARMATUREN
GERMANY

PATTA[®]



TOWER[®]
TOOLS

ATLAS FILTRI[®]
improving water



Pentagono[®]
RUBINETTERIE MADE IN ITALY

Kapriol[®]
made in italy utensili per l'edilizia



UNION[®]
ASSA ABLOY



SKO[®] KISTENMACHER

akwa

Oman Branches

Wadi Kabir

☎ 94304268 / 94154149

✉ wkbr@alkhalili.com

Ghobrah

☎ 94304309 / 99880375

✉ ghbbr@alkhalili.com

Mabellah

☎ 95970596 / 99329826

✉ mblbr@alkhalili.com

Barka

☎ 94304278 / 99345495

✉ brkbr@alkhalili.com

Sur

☎ 95520977 / 99329824

✉ surbr@alkhalili.com

Jalan

☎ 96658604 / 99268039

✉ jlnbr@alkhalili.com

Nizwa

☎ 97699191 / 99341040

✉ nizbr@alkhalili.com

Sinaw

☎ 97892525 / 92877261

✉ snbr@alkhalili.com

Bidaya

☎ 26708946 / 99230892

✉ bidbr@alkhalili.com

Sohar

☎ 99324349 / 92856446

✉ shrbr@alkhalili.com

Karsha

☎ 94107048 / 97445049

✉ krsbr@alkhalili.com

Duqum

☎ 97443985 / 96781961

✉ dqmbr@alkhalili.com

Ibri

☎ 97122759 / 96776720

✉ ibribr@alkhalili.com

Rustaq

☎ 95969767 / 96784374

✉ rsqbr@alkhalili.com

Salalah

☎ 94052930 / 99331648

✉ salbr@alkhalili.com

Tharmad

☎ 97016372 / 97016382

✉ tmdbr@alkhalili.com

Thumrait

☎ 94304289 / 97445024

✉ tumbr@alkhalili.com

Liwa

☎ 94128732 / 97449489

✉ liwabr@alkhalili.com

Barka Saq Souq

☎ 97123153 / 99887614

✉ ssbr@alkhalili.com

Khabourah

☎ 95036922 / 95969357

✉ kbrbr@alkhalili.com

Ibra

☎ 22842010 / 97342010

✉ ibrabr@alkhalili.com

Sahalnoot

☎ 99885714 / 94141735

✉ sntbr@alkhalili.com

Mall of Oman

☎ 96505353 / 24585353

✉ buildex.moo@alkhalili.com

Misfah

☎ 22842555 / 79692555

✉ misfahbr@alkhalili.com

Samail

☎ 97652737 / 97662737

✉ sambr@alkhalili.com



مجموعة الخليلي
Al Khalili Group



Corporate Office



مجموعة الخليلي
Al Khalili Group



Al Khalili United Enterprises LLC

P.O. Box 1869, PC 112, Sultanate of Oman

T: +968 2203 5000 | +968 9744 9624 | F: +968 2461 3503

saleshw@alkhalili.com

info@alkhalili.com | www.alkhalili.com